



TRS-F Series Specifications

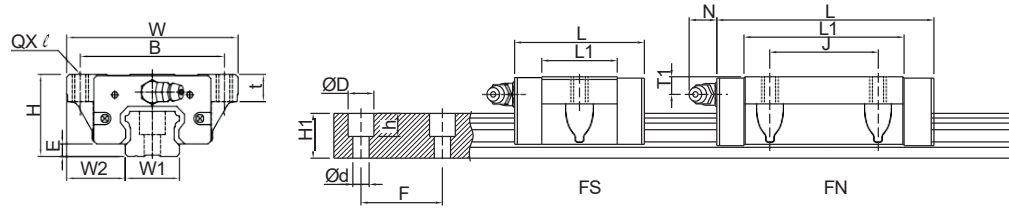


| Model No. | Assembly(mm) | | | Block Dimension(mm) | | | | | | | | Rail(mm) | | | | | | | |
|-----------|--------------|------|-----|---------------------|----|----|----|------|------|-----------------|-----|----------|----|----|------|-----|-----|-----|----|
| | H | W2 | E | W | B | J | t | L | L1 | QX ₁ | T1 | Oil Hole | N | W1 | H1 | ØD | h | Ød | F |
| TRS15FS | 24 | 18.5 | 3.2 | 52 | 41 | 26 | 7 | 40.3 | 22.9 | M5X7 | 5.5 | M4X0.7 | 7 | 15 | 13 | 7.5 | 6 | 4.5 | 60 |
| TRS15FN | | | | | | | | 56.9 | 39.5 | | | | | | | | | | |
| TRS20FS | 28 | 19.5 | 4.6 | 59 | 49 | 32 | 9 | 49.4 | 27.8 | M6X9 | 4.5 | M6X1 | 14 | 20 | 16.5 | 9.5 | 8.5 | 6 | 60 |
| TRS20FN | | | | | | | | 68.3 | 46.7 | | | | | | | | | | |
| TRS25FN | 33 | 25 | 5.8 | 73 | 60 | 35 | 10 | 81 | 59 | M8X10 | 4.5 | M6X1 | 14 | 23 | 20 | 11 | 9 | 7 | 60 |


TRC-V Series Specifications

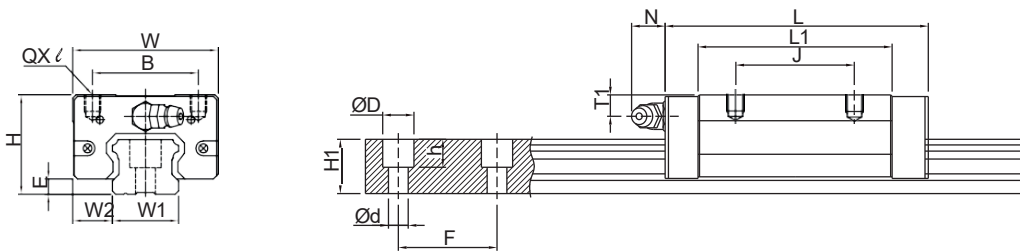

| Model No. | Assembly(mm) | | | Block Dimension(mm) | | | | | | | | Rail(mm) | | | | | | |
|-----------|--------------|------|-----|---------------------|----|----|-----|----|-----------------|-----|----------|----------|----|----|----|---|----|----|
| | H | W2 | E | W | B | J | L | L1 | QX ₁ | T1 | Oil Hole | N | W1 | H1 | ØD | h | Ød | F |
| TRC25VE | 36 | 12.5 | 5.8 | 48 | 35 | 50 | 110 | 88 | M6X6.5 | 7.5 | M6X1 | 14 | 23 | 20 | 11 | 9 | 7 | 60 |

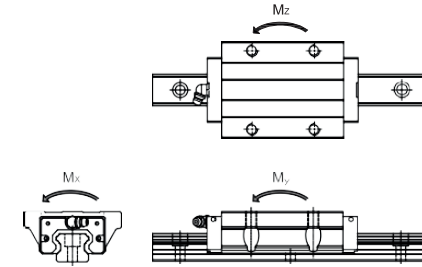

| Model No. | Load Rating (kgf) | | Static Permissible Moment | | | | | Weight | |
|-----------|-------------------|------|---------------------------|--------------|--------------|--------------|--------------|------------|-------------|
| | | | Mx (kg-mm) | My (kg-mm) | | Mz (kg-mm) | | Block (kg) | Rail (kg/m) |
| | | | | Single Block | Single Block | Double Block | Single Block | | |
| TRS15FS | 908 | 1471 | 10,957 | 6,420 | 33,531 | 6,420 | 33,531 | 0.12 | 1.32 |
| TRS15FN | 1206 | 2206 | 16,436 | 14,884 | 70,960 | 14,884 | 70,960 | 0.19 | |
| TRS20FS | 1398 | 2140 | 21,615 | 10,700 | 59,798 | 10,700 | 59,798 | 0.19 | 2.28 |
| TRS20FN | 1896 | 3307 | 33,404 | 26,459 | 126,998 | 26,459 | 126,998 | 0.29 | |
| TRS25FN | 2581 | 4503 | 52,239 | 43,407 | 207,324 | 43,407 | 207,324 | 0.51 | 3.17 |

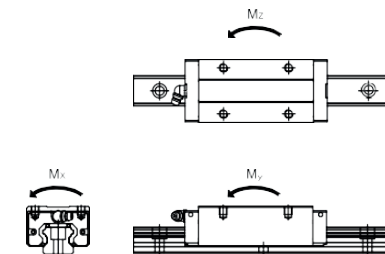

| Model No. | Load Rating (kgf) | | Static Permissible Moment | | | | | Weight | |
|-----------|-------------------|------|---------------------------|--------------|--------------|--------------|--------------|------------|-------------|
| | | | Mx (kg-mm) | My (kg-mm) | | Mz (kg-mm) | | Block (kg) | Rail (kg/m) |
| | | | | Single Block | Single Block | Double Block | Single Block | | |
| TRC25VE | 3248 | 6255 | 72,554 | 85,112 | 391,311 | 85,112 | 391,311 | 0.65 | 3.17 |